





ZIP HYDROCHILL HCS120 CHILLED SPARKLING FILTERED



CHILLED SPARKLING

FILTERED

Order Code HCS120

The new Zip HydroChill is the answer to supporting staff and customers’ wellbeing through healthy hydration. Embrace the refill revolution and reduce environmental impact, without sacrificing time or convenience. Delivering up to 120 litres of filtered water, chilled, ambient or sparkling water per hour, HydroChill is the perfect solution for corporate and commercial use, where high volumes of drinking water are needed straight from the tap.

Manufacturing Code	HCS120
Ambient Litres per hour	Unlimited
Combined Chilled and Sparkling Litres per hour	120L




Tap	3 Lever Chrome high flow bottle filling tap
Water Pressure	Min 172kPa - Max 700kPa
Water Connection	12.7mm BSP
Water Supply Requirements	Cold
Water Valves	Supplied with a 350kPa Pressure limiting valve and Dual Check Valve
Power Rating	230V 50Hz
Power Supply	1 x 10Amp GPO
Dimensions	H 616mm x W425mm x D425mm
Product Approvals	WaterMark, CE, RCM, ARC
Warranty	Comprehensive 12 Months parts and labour warranty

Installation Requirements

1. Installation and connection of your Zip HydroChill must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. HydroChill products are air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com

Installation Detail

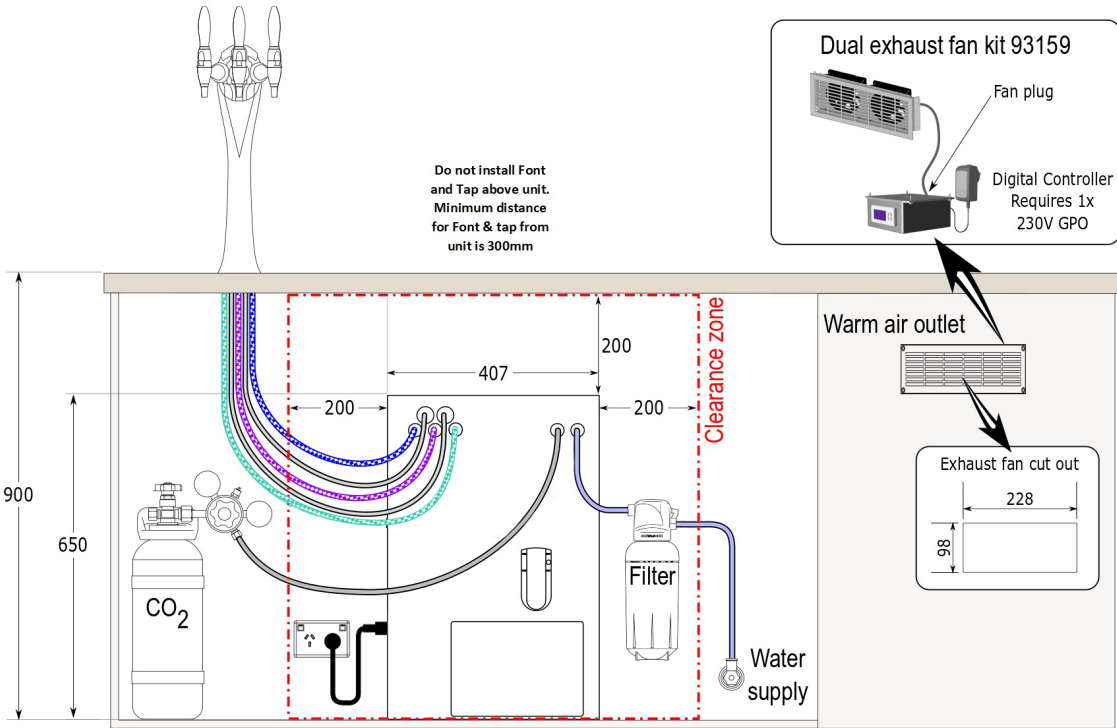

HCS120