



HYDROTAP G5 BCS100 TOUCH-FREE WAVE CHROME

 **BOILING**

 **CHILLED**

 **SPARKLING**

FILTERED

Order Code H5W763Z00AU

Zip HydroTap Touch-Free Wave Boiling, Chilled, Sparkling, Filtered water uses smart infrared 100% touch-free operation that is activated with the Wave of a hand. The water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 2 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and a refillable CO2 cylinder.



Manufacturing Code	H5W763Z00AU
Capacity	Commercial
Boiling Cups per hour	240
Chilled Cups per hour	175
Combined Chilled and Sparkling Cups per hour	175

Tap	Zip HydroTap Touch-Free Wave tap (Chrome)
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	2.15kW 220-240V 50Hz
Booster Power Rating	Zip HydroTap Booster 2.2kW 220-240V 50/60Hz
Power Supply	2 x 10 Amp socket outlets
Dimensions	W395mm x D464mm x H333mm
Product Approvals	WaterMark, RCM, ARC
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Installation Requirements






1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.
3. Zip Micro is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Installation Detail

BKL2 HydroTap G5 v1.01 03.21 BCS60 BCS100


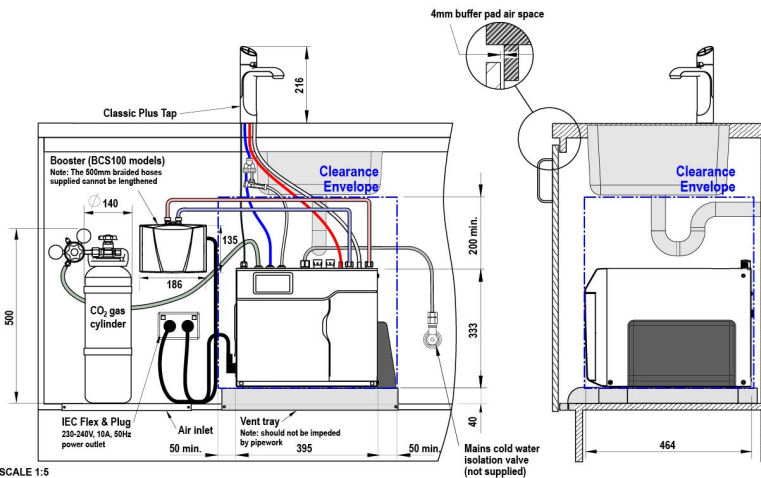

Ventilation requirements Contact your local service provider if ventilation is not suitable**Clearance envelope**

Position the Tap and the Command Centre as close together as possible.

**Vent tray (kit no. 93540)****HydroTap Tap options****Font options****Raised Font with 135mm Extension**
part no. 95238**Font with 135mm Extension**
part no. 90915**Detail A. Air inlet grille**
Cut-out in cabinet floor**Detail B. Vent Tray air outlet**
Cut-out in cabinet floor**Tap Positioning**

Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap Tap on a Font (available as an accessory).

Ø35mm hole for HydroTap Tap

**Cutting detail****Cutting detail**

SCALE 1:5

ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

HydroTap G5
BCS60, BCS100

shown with "Classic Plus" Tap