



HYDROTAP G5 BHA60 3-IN-1 CLASSIC TAP WITH CUBE MIXER CHROME



BOILING



HOT & AMBIENT

FILTERED

UNFILTERED

Order Code H51956Z00AU

Zip HydroTap Classic 3 in 1 Boiling, Filtered water plus Hot and Cold washing up water from two separate taps. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 boiling water safety modes, 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration.



Manufacturing Code	H51956Z00AU
--------------------	-------------

Capacity	Commercial
----------	------------

Boiling Cups per hour	160
-----------------------	-----

Tap	Zip HydroTap CLASSIC Tap (Chrome)
Water Pressure	Min 300kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	1.8kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W280mm x D313mm x H333mm
Product Approvals	WaterMark, RCM
Wels Rating	5 Star, 5.5 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
 2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.
 3. Zip Micro is air-cooled so discrete cabinetry cut-outs are required for ventilation.
 4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
 5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
 6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit
-

Installation Detail



BKL2 HydroTap G5 v1.01 03.21 B, BA



Ventilation requirements Contact your local service provider if ventilation is not suitable

Clearance envelope


Position the Tap and the Command Centre as close together as possible.





Air outlet louvre (if required)
Cut-out in door/wall, towards the top of the cabinet



Air inlet cut-out (required)
Cut-out in cabinet floor



HydroTap Tap options



Tap Positioning


Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap Tap on a Font (available as an accessory).

35mm hole for HydroTap Tap 35mm hole for Mixer Tap




Mixer Tap options


Arc Mixer Tap




Cube Mixer Tap



Classic Mixer Tap





Accessible Mixer Tap



Vented mixer tap installation

Only cold water supply required

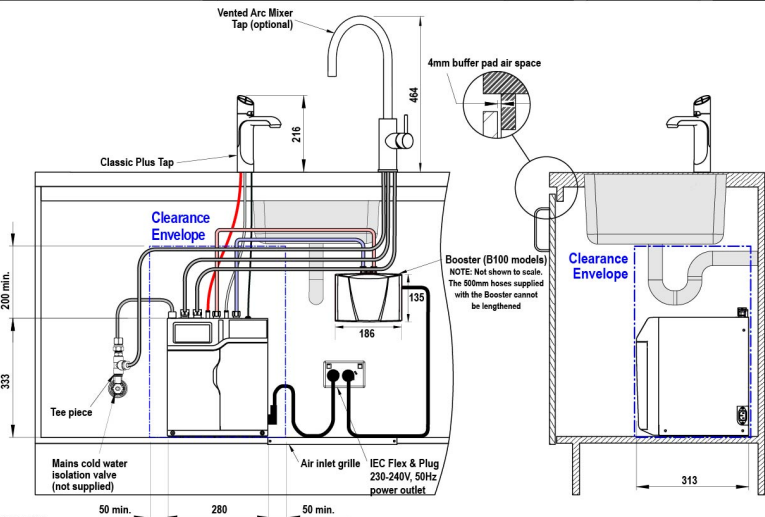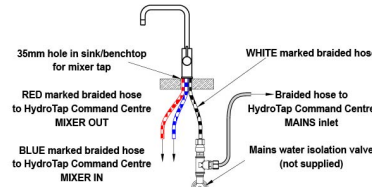

SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

**HydroTap G5
B60 H, B100 H**

shown with "Classic Plus" Tap and Arc Mixer Tap (V)