



## AF Series Self Contained Flake Ice Machine – up to 113kg AF 124 AS OX Flake Ice



Flake ice

Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 113kg daily production rate
- 40kg storage bin capacity
- Air cooled version
- XSafe Natural Sanitation System
- Stainless steel auger and freezing cylinder evaporator
- Water in / ice out concept limits excess energy, water and time wastage
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Clean alert indicator to clean filter
- Resistant stainless steel exterior
- Easy access front condenser air filter
- External indicator lights to show operation status
- Includes removable air filter, ice scoop, water and drain hose






















# AF Series Self Contained Flake Ice Machine – up to 113kg

## **AF 124 AS OX**

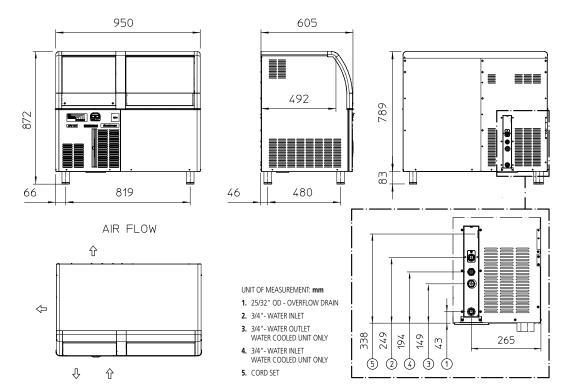



#### moffat.com.au

#### Australia Moffat Pty Limited

#### Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au

#### New South Wales

Telephone 02-8833 4111 nswsales@moffat.com.au

#### South Australia

Telephone 03-9518 3888 vsales@moffat.com.au

#### Queensland

Telephone 07-3630 8600 qldsales@moffat.com.au

#### Western Australia

Telephone 08-9413 2400 wasales@moffat.com.au

## Ice production per 24 hours

Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
122	113	91

#### Dimensions

Width: 950mm Depth 605mm

Height: 872mm (including legs)

Nett weight: 66kg Packed weight: 77kg

#### Water consumption

Air cooled version: 3.9 litres per hour

## Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 510W,

10A cordset supplied
No. Circuit wire: 3
Compressor: 1200W
Energy consumption: 11.4kW/24hr

## Refrigerant type

R404a

### Installation distance from wall

Rear 100mm Sides 150mm

Operating requirement air temperature 10-43°C

#### Water connection requirements

Varies Connection: R 3/4"

Cold water: 5-38°C

Pressure: 100-500kPa

Water outlet connection: Ø3/4"

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd